

Winding Type Chip Inductor

SNLU322522QV-SERIES

1. Features


1. Ferrite core wire wound construction.
2. High Reliability due to wire wound type construction.
3. Small footprint as well as low profile.
4. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
5. High reliability -Reliability tests comply with AEC-Q200
6. Operating temperature-40~+125°C (Including self - temperature rise)



2. Application

- a. Vehicle accessories (car navigation systems, car audio, ETC, other).
- b. Smart meters, AV equipment, xDSL, electronic devices for communications infrastructure such as mobile base stations, industrial equipment, other

3. Dimension

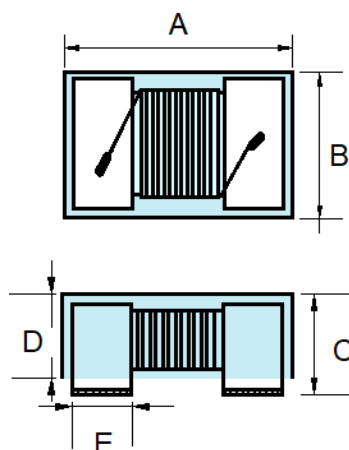

Size	A	B	C	D	E
SNLU322522	3.20±0.30	2.50±0.30	2.20±0.20	1.80±0.10	0.55 ref

Unit:mm

4. Part Numbering

SNLU	322522	Q	V	-	1R0	M
A	B	C	D		E	F

A: Series

B: Dimension L x WxH

C: Application

D: Category Code V=Vehicle

E: Inductance 1R0=1.0uH

F: Inductance Tolerance J=±5%, K=±10%

5. Specification

TAI-TECH Part Number	Ls (uH)	Tolerance	L / Q Frequency	Q Ref.	SRF (MHz) ref.	DCR (Ω)Max	IDC(A) Max
SNLU322522QV-10N□	0.010	J,K	100M	15	2500	0.13	0.450
SNLU322522QV-12N□	0.012	J,K	100M	17	2300	0.14	0.450
SNLU322522QV-15N□	0.015	J,K	100M	19	2100	0.16	0.450
SNLU322522QV-18N□	0.018	J,K	100M	21	1900	0.18	0.450
SNLU322522QV-22N□	0.022	J,K	100M	23	1700	0.22	0.450

TAI-TECH Part Number	Ls (uH)	Tolerance	L / Q Frequency	Q Ref.	SRF (MHz) ref.	DCR (Ω)Max.	IDC(A) Max
SNLU322522QV-27N□	0.027	J,K	100M	23	1500	0.22	0.450
SNLU322522QV-33N□	0.033	J,K	100M	25	1400	0.24	0.450
SNLU322522QV-39N□	0.039	J,K	100M	25	1300	0.27	0.450
SNLU322522QV-47N□	0.047	J,K	100M	26	1200	0.30	0.450
SNLU322522QV-56N□	0.056	J,K	100M	26	1100	0.33	0.450
SNLU322522QV-68N□	0.068	J,K	100M	27	1000	0.36	0.450
SNLU322522QV-82N□	0.082	J,K	100M	28	900	0.40	0.450
SNLU322522QV-R10□	0.10	J,K	100M	28	700	0.44	0.450
SNLU322522QV-R12□	0.12	J,K	25.2M	30	500	0.22	0.450
SNLU322522QV-R15□	0.15	J,K	25.2M	30	450	0.25	0.450
SNLU322522QV-R22□	0.22	J,K	25.2M	30	350	0.32	0.450
SNLU322522QV-R27□	0.27	J,K	25.2M	30	320	0.36	0.450
SNLU322522QV-R33□	0.33	J,K	25.2M	30	300	0.40	0.450
SNLU322522QV-R47□	0.47	J,K	25.2M	30	220	0.50	0.450
SNLU322522QV-R56□	0.56	J,K	25.2M	30	180	0.55	0.450
SNLU322522QV-R68□	0.68	J,K	25.2M	30	160	0.60	0.450
SNLU322522QV-R82□	0.82	J,K	25.2M	30	140	0.65	0.450
SNLU322522QV-1R0□	1.0	J,K	7.96M	30	120	0.70	0.400
SNLU322522QV-1R5□	1.5	J,K	7.96M	30	85	0.85	0.370
SNLU322522QV-2R2□	2.2	J,K	7.96M	30	75	1.0	0.320
SNLU322522QV-3R3□	3.3	J,K	7.96M	30	60	1.2	0.260
SNLU322522QV-4R7□	4.7	J,K	7.96M	30	50	1.5	0.220
SNLU322522QV-5R6□	5.6	J,K	7.96M	30	45	1.6	0.200
SNLU322522QV-6R8□	6.8	J,K	7.96M	30	40	1.8	0.180
SNLU322522QV-8R2□	8.2	J,K	7.96M	30	30	2.0	0.170
SNLU322522QV-100□	10	J,K	2.52M	30	30	2.1	0.150
SNLU322522QV-220□	22	J,K	2.52M	30	20	3.7	0.110
SNLU322522QV-330□	33	J,K	2.52M	30	17	5.6	0.070
SNLU322522QV-470□	47	J,K	2.52M	30	15	7.0	0.060
SNLU322522QV-680□	68	J,K	2.52M	30	12	9.0	0.050
SNLU322522QV-820□	82	J,K	2.52M	30	11	10.0	0.045
SNLU322522QV-101□	100	J,K	0.796M	20	10	10.0	0.040
SNLU322522QV-121□	120	J,K	0.796M	20	10	11.0	0.040
SNLU322522QV-151□	150	J,K	0.796M	20	10	11.0	0.065

TAI-TECH Part Number	Ls (uH)	Tolerance	L / Q Frequency	Q Ref.	SRF (MHz) ref.	DCR (Ω)Max.	IDC(A) Max
SNLU322522QV-181□	180	J,K	0.796M	20	7	17.0	0.060
SNLU322522QV-221□	220	J,K	0.796M	20	7	21.0	0.050
SNLU322522QV-271□	270	J,K	0.796M	20	6	28.0	0.045
SNLU322522QV-331□	330	J,K	0.796M	20	5	34.0	0.040
SNLU322522QV-391□	390	J,K	0.796M	20	5	38.0	0.035
SNLU322522QV-471□	470	J,K	0.796M	20	4	40.0	0.025