

Power Inductor


DFP322510BF-SERIES

1. Features

1. This specification applies Low Profile Power Inductors.
2. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
3. Operating temperature :-40~+125°C (Including self - temperature rise).




2. Dimension

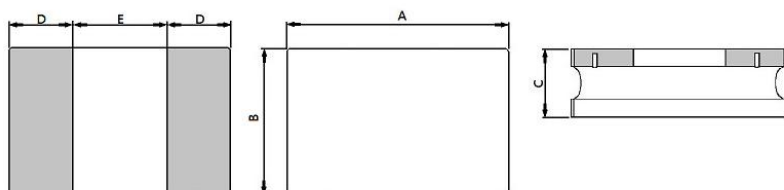

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
DFP322510BF	3.2 ± 0.2	2.5 ± 0.2	1.0Max	1.0±0.2.	1.3±0.2.

Units: mm

3. Part Numbering



A: Series

B: Dimension

C: Lead Free

Material

D: Inductance

1R0=1.0uH

E: Inductance Tolerance

M=±20%

4. Specification

TAI-TECH Part Number	Inductance (uH)	Tolerance (%)	Test Frequency (Hz)	DCR (Ω) typ.	DCR (Ω) Max.	I sat (A)	I rms (A)
DFP322510BF-R47M	0.47	±20	1V/1M	0.028	0.034	5.00	4.00
DFP322510BF-R68M	0.68	±20	1V/1M	0.038	0.045	4.10	3.50
DFP322510BF-1R0M	1.00	±20	1V/1M	0.055	0.065	3.60	2.80
DFP322510BF-1R5M	1.50	±20	1V/1M	0.072	0.086	2.80	2.30
DFP322510BF-2R2M	2.20	±20	1V/1M	0.098	0.118	2.40	1.70
DFP322510BF-3R3M	3.30	±20	1V/1M	0.160	0.190	2.00	1.50
DFP322510BF-4R7M	4.70	±20	1V/1M	0.220	0.264	1.70	1.40
DFP322510BF-6R8M	6.80	±20	1V/1M	0.330	0.396	1.35	1.10
DFP322510BF-100M	10.0	±20	1V/1M	0.500	0.600	1.20	0.90

Note:

Isat : Saturation Current (Isat) will cause L0 to drop approximately 30%.

Irms : Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C.

Rated DC Current : The less value which is Irms or Isat.

Measurement board data

Irms

Material : FR4

Board dimensions : 100 X 50 X 1.6t mm

Pattern dimensions: 45 X 30 mm (Double side board)

Pattern thickness : 50 μm

5. Typical Performance Curves

